

GENERAL SAFETY RULES

WARNING! Read and understand all instructions.

Failure to follow all instructions listed below may result in electric shock, fire and/or serious personal injury.

SAVE THESE INSTRUCTIONS.

Work Area

1. Keep your area clean and well lit. Cluttered benches and dark areas invite accidents.
2. Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases, or dust. Power tools create sparks which may ignite the dust or fumes.
3. Keep bystanders, children, and visitors away while operating a power tool. Distractions can cause you to lose control.
4. Do not let visitors contact the tool or extension cord. Such preventative measures reduce the risk of injury.

Electrical Safety

1. Grounded tools must be plugged into an outlet properly installed and grounded in accordance with all codes and ordinances. Never remove the grounding prong or modify the plug in any way. Do not use any adapter plugs. Check with a qualified electrician if you are in doubt as to whether the outlet is properly grounded. If the tools should electrically malfunction or break down, grounding provides a low resistance path to carry electricity away from the user.
2. Double insulated tools are equipped with a polarized plug (one blade is wider than the other.) This plug will fit a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician to install a polarized outlet. Do not change the plug in any way. Double insulation eliminates the need for the three wire grounded power cord and grounded power supply system.

3. Avoid body contact with grounded surfaces as pipes, radiators, ranges and refrigerators. There is an increased risk of electric shock if your body is grounded.
4. Don't expose power tools to rain or wet conditions. Water entering a power tool will increase the risk of electric shock.
5. Do not abuse the cord. Never use the cord to carry the tools or pull from an outlet. Keep cord away from heat, oil, sharp edges or moving parts. Replace damaged cords immediately. Damaged cords increase the risk of electric shock.
6. When operating a power tool outside, use an outdoor extension cord marked "W-A" or "W." These cords are rated for outdoor use and reduce the risk of electric shock.

Personal Safety

1. Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use tool while tired or under the influence of drugs, alcohol, or medication. A moment of inattention while operating power tools may result in serious personal injury.
2. Dress properly. Do not wear loose clothing or jewelry. Contain long hair. Keep your hair, clothing, and gloves away from moving parts. Loose clothes, jewelry, or long hair can be caught in moving parts.
3. Avoid accidental starting. Be sure switch is off before plugging in. Carrying tools with your finger on the switch or plugging in tools that have the switch on invites accidents.
4. Remove adjusting keys or switches before turning the tool on. A wrench or a key that is left attached to a rotating part of the tool may result in personal injury.
5. Do not overreach. Keep proper footing and balance at all times. Proper footing and balance enables better control of the tool in unexpected situations.
6. Use safety equipment. Always wear eye protection. Dust mask, non-skid safety shoes, hard hat, or hearing protection must be used for appropriate conditions.

Tool Use and care

1. Use clamps or other practical way to secure and support the work piece to a stable platform. Holding the work by hand or against your body is unstable and may lead to loss of control.
2. Do not force tool. Use the correct tool for your application. The correct tool will do the job better and safer at the rate for which it is designed.
3. Do not use tool if switch does not turn it on or off. Any tool that cannot be controlled with the switch is dangerous and must be repaired.
4. Disconnect the plug from the power source before making any adjustments, changing accessories, or storing the tool. Such preventative safety measures reduce the risk of starting the tool accidentally.
5. Store idle tools out of reach of children and other untrained persons. Tools are dangerous in the hands of untrained users.
6. Maintain tools with care. Keep cutting tools sharp and clean. Properly maintained tools, with sharp cutting edges are less likely to bind and are easier to control.
7. Check for misalignment or binding of moving parts, breakage of parts, and any other condition that may affect the tool's operation. If damaged, have the tool serviced before using. Many accidents are caused by poorly maintained tools.
8. Use only accessories that are recommended by the manufacturer for your model. Accessories that may be suitable for one tool may become hazardous when used on another tool.
9. Inspect tool and extension cords periodically and replace if damaged. Damaged cords increase the risk of electrical shock.
10. Keep handles dry and clean; free from oil and grease. Allows for better control of the tool.
11. Store tools in dry place. Such measures reduce the risk of electrical shock.

Service


1. Only qualified repair personnel must perform tool service. Service or maintenance performed by unqualified personnel could result in a risk of injury.
2. When servicing a tool, use only identical replacement parts. Follow instructions in the Maintenance section of this manual. Use of unauthorized parts or failure to follow Maintenance Instructions may create a risk of electric shock or injury.

Specific Safety Information

1. Be sure that the unit is plugged into properly grounded and polarized outlet. If in doubt, check outlet before plugging in machine. Check power cord to see that there are no cuts or frays.
2. The Skil drive unit used in the Super-Vee is double insulated and, therefore, has no grounding wire. To reduce the risk of electric shock, this equipment has a polarized plug (one blade is wider than the other). The plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If the plug still does not fit, contact a qualified electrician to install the proper outlet. Do not change the plug in any way.
3. If the power cord is not long enough, be sure to use a minimum 16 gauge heavy duty extension cord no more than 50 ft. long and in good condition. Use of lighter cords can result in severe power loss and overheating.
4. Wear rubber boots and rubber glove inserts when work area is wet. Do not operate machine if operator is standing in water.
5. The equipment is designed to be used by a single operator only.
6. Wear safety glasses when operating machine.
7. Wear leather gloves only, not cloth gloves, when handling the cable while it's rotating.
8. Neutralize or remove corrosive drain cleaners from drain before starting. Exposure to these chemicals can cause injury to the operator and damage the cable.
9. Never take hold of a rotating cable. Pull the cable out of or push it back into the container by hand only when the motor is stopped. When the motor is turning, always have one hand controlling the trigger switch and the other hand around the grip shield.
10. The Super-Vee must be operated within one foot of drain opening. If you can't get the machine this close to the drain opening, run the cable through metal tubing or conduit to prevent cable whipping and kinking.
11. Before starting each job, check that the cable in the container is not broken or kinked, by pulling the cable out and checking for wear or breakage, Always replace worn out (kinked or broken) cables with genuine GENERAL replacement cables.

Operating Instructions

1. Slide the grip shield forward to release cable.
Place the cable in the drain by hand as far as it will go.
Leave six inches of cable between the machine and drain.

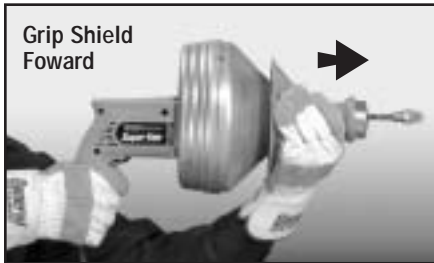

2. Slide the grip shield back to grip cable. Then gently squeeze the trigger and move the machine toward the drain opening. **DO NOT FORCE THE CABLE.**
The job won't go any faster and you could kink the cable.



3. After the cable has fed into the drain, release the trigger.
4. Slide the grip shield forward to release the cable.
Pull the Super-Vee back while holding the cable in place.
After you are past the first bend, you probably will not have to hold the cable as you pull the machine back.



5. Slide the grip shield back, squeeze the trigger and move the machine toward the drain again. Then slide the grip shield forward and pull the machine back. Be sure to allow no more than six inches of cable between the machine and drain opening. Too much slack in the cable can cause it to tangle and kink.
6. Repeat procedure until you have worked through the stoppage.
7. Reverse the procedure to pull the cable out of the line.

CAUTION:

Do not use reverse to pull cable out of the drain. Always run your machine in forward, whether you are feeding the cable into the line or pulling it out. Use reverse only to release cable if it should become caught in the line.



To Change Cable Cartridges

1. Remove the cutter and screw from the cable, if one is attached.
2. Loosen the three screws that hold the front and back of container together.
3. Pull the container off the front of machine.
4. Remove the cartridge. Press replacement cartridge firmly into back of container. Make sure to line up grooves in the cartridge with slots in the container back.
5. Slide cable through the front of the container. Be sure the grip shield is in the forward position. Position container front so that the screws and slots in the container back are aligned.
6. Tighten screws firmly, making sure they are centered in the slots, and tightened so that the heads of the screws are flush with the container.

